

Sandringham 21 Steel bath 150cm x 70cm 2 Tapholes With Handgrips & Anti-slip*

ILLUSTRATED

S1833	Sandringham 21 150cm x 70cm standard gauge steel bath with chrome plated grips, two tapholes and anti-slip*
B9870	Sandringham 21 2 hole bath filler
S0915	Bath flat front panel
S0916	Bath flat end panel
S9365	Bath panel plastic corner edge strip
S8970	Trap 1½" plastic P with 75mm seal, multi-purpose outlet suitable for plastic and BS copper pipe
S8840	1 1/2" combination bath waste & trap with overflow and domed clicker
A5901	TMV thermostatic mixing valve, 22mm

ILLUSTRATED PRODUCT DETAILS









Weights

S1833	24.32 KG
B9870	2.10 KG
S0915	2.14 KG
S0916	3.50 KG
S9365	0.01 KG
S8970	1.00 KG
S8840	0.31 KG
A5901	1.70 KG

Materials

S1833	Porcelain Enamelled Steel
B9870	Chrome Plated Brass
S0915	Acrylic
S0916	Acrylic
S9365	Plastic
S8970	Plastic
S8840	Plastic
A5901	Chrome Plated Metal

Finishes

S1833		White (01)
B9870		Chrome (AA)
S0915		White (01)
S0916		White (01)
S9365		White (01)
S8970		Neutral / No Finish (67)
S8840		Chrome (AA)
A5901		Chrome (AA)

Capacity

S1833	139.0 litres (to overflow)
--------------	----------------------------

Flow rates



B9870	16.5 Litres per minute @ 3 bar pressure
--------------	---

Standards

BS 1390:1990. EN 14516

Special Notes

*Anti slip is a resistant finish that reduces the chances of slipping, it does not prevent all slipping. Not suitable in areas involving the use of special chemicals. Framework is required at installation to support rim and secure panel. Panels require trimming to size at installation. Consideration should be given to safe hot water delivery and the use of an appropriate temperature reduction device, see A5901AA or Part G for guidance.

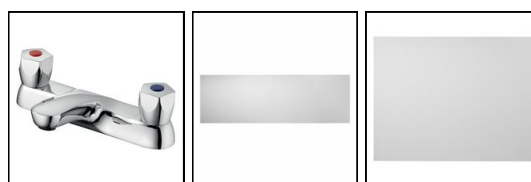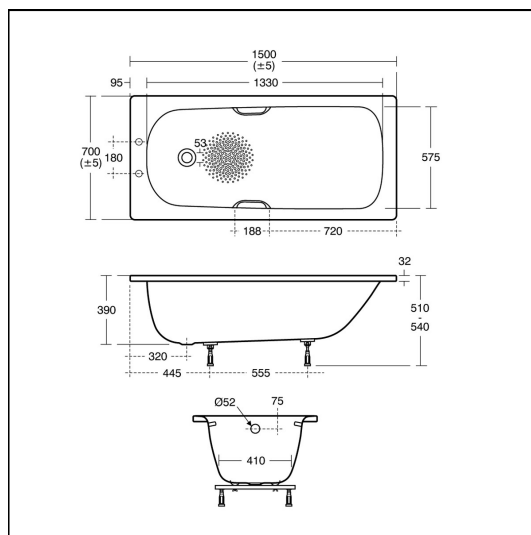

ACCREDITATIONS

B9870(AA)

Unified Water Label  16.50 Litres Per Minute

S1833(01)

Unified Water Label  139.0 Litres

FEATURES

